

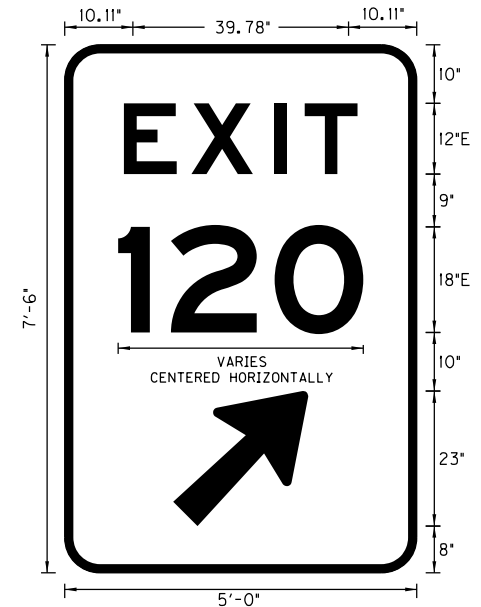
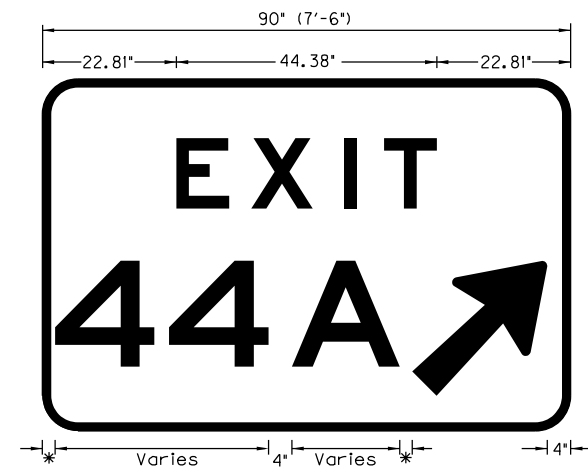


**GENERAL NOTES:**

- BORDER RADIUS SHALL BE 6"
- BORDER THICKNESS SHALL BE 1.5 INCH.
- \* - INDICATES THAT THE EXIT NUMBER & SUFFIX (IF USED) SHOULD BE CENTERED BETWEEN THE EDGE OF THE SIGN AND THE ARROW AS SHOWN.
- (4) DIMENSION SHALL BE UTILIZED FOR EACH DESIGN UNLESS OTHERWISE SHOWN.
- (5) INCREASE CHARACTER SPACING 225% AS SHOWN PER DIMENSIONS.

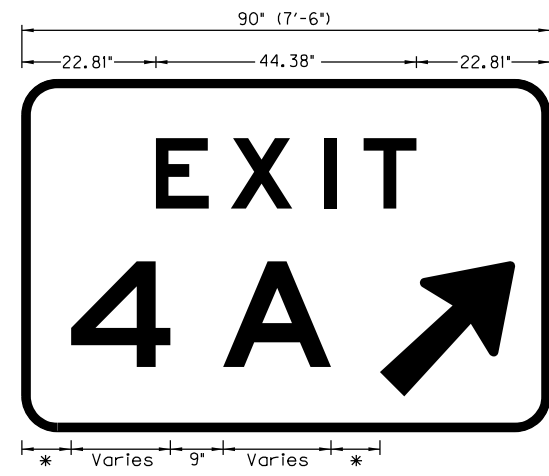

NOTE:  
THE NARROW EXIT GORE SIGN (ABOVE) MAY BE USED IN GORE AREAS OF LIMITED WIDTH WHERE THE WIDTH OF THE EXIT GORE SIGN WOULD NOT PERMIT SUFFICIENT LATERAL OFFSET (SEE MUTCD SECTION 2A.19), SUCH AS FOR RAMP DEPARTURES THAT ARE NEARLY PARALLEL TO THE MAINLINE ROADWAY WHERE THE EXIT GORE SIGN WOULD BE MOUNTED ON A NARROW ISLAND OR BARRIER.

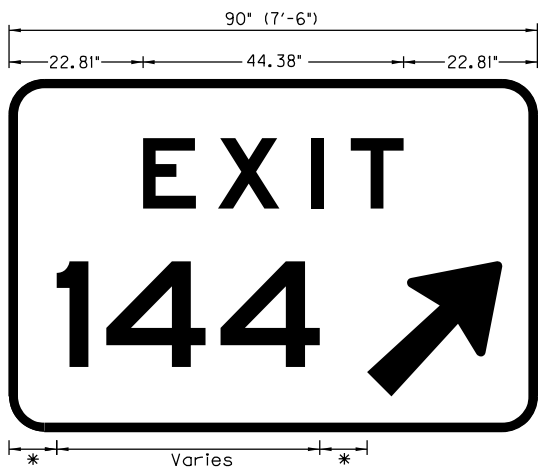