

1 ADDITIONAL STEEL REINFORCEMENT REQUIRMENTS
(PIPE CHAMBER, H = 8' TO 15', GRADE CONDITION)

SIZE 2		NO. 5 STEEL BARS									
X	Y	3 BAR n		4 BAR p		BAR q		BAR r		LBS. 5	
		QTY.	LIN. FT.	QTY.	LIN. FT.	QTY.	LIN. FT.	QTY.	LIN. FT.	TOTAL	6
2'-3"	1'-3"	16	6'-0"	6	9'-3"	4	1'-9"	3	2'-9"	174	26
	2'-0"	20			10'-9"		2'-6"	4		214	32
	2'-6"	22			11'-9"		3'-0"	5		238	35
	3'-0"	24			12'-9"		3'-6"	6		262	38
	3'-6"	26			13'-9"		4'-0"	7		286	41
	4'-0"	28			14'-9"		4'-6"	8		309	45
	4'-6"	30			15'-9"		5'-0"	9		333	48
	5'-0"	32			16'-9"		5'-6"	10		357	51
2'-6"	1'-3"	20	6'-0"	6	9'-9"	5	1'-9"	3	3'-0"	205	31
	2'-0"	22			11'-3"		2'-6"	4		234	35
	2'-6"	24			12'-3"		3'-0"	5		258	38
	3'-0"	26			13'-3"		3'-6"	6		283	41
	3'-6"	28			14'-3"		4'-0"	7		307	44
	4'-0"	30			15'-3"		4'-6"	8		332	47
	4'-6"	32			16'-3"		5'-0"	9		356	50
	5'-0"	34			17'-3"		5'-6"	10		381	53
3'-0"	1'-3"	22	6'-0"	6	10'-9"	6	1'-9"	3	3'-6"	227	34
	2'-0"	24			12'-3"		2'-6"	4		257	38
	2'-6"	26			13'-3"		3'-0"	5		283	41
	3'-0"	28			14'-3"		3'-6"	6		308	44
	3'-6"	30			15'-3"		4'-0"	7		334	47
	4'-0"	32			16'-3"		4'-6"	8		359	50
	4'-6"	34			17'-3"		5'-0"	9		385	53
	5'-0"	36			18'-3"		5'-6"	10		410	57
3'-6"	1'-3"	24	6'-0"	6	11'-9"	7	1'-9"	3	4'-0"	249	37
	2'-0"	26			13'-3"		2'-6"	4		281	41
	2'-6"	28			14'-3"		3'-0"	5		307	44
	3'-0"	30			15'-3"		3'-6"	6		334	47
	3'-6"	32			16'-3"		4'-0"	7		360	50
	4'-0"	34			17'-3"		4'-6"	8		387	53
	4'-6"	36			18'-3"		5'-0"	9		414	57
	5'-0"	38			19'-3"		5'-6"	10		440	60
4'-0"	1'-3"	26	6'-0"	6	12'-9"	8	1'-9"	3	4'-6"	271	40
	2'-0"	28			14'-3"		2'-6"	4		304	44
	2'-6"	30			15'-3"		3'-0"	5		332	47
	3'-0"	32			16'-3"		3'-6"	6		359	50
	3'-6"	34			17'-3"		4'-0"	7		387	53
	4'-0"	36			18'-3"		4'-6"	8		415	57
	4'-6"	38			19'-3"		5'-0"	9		442	60
	5'-0"	40			20'-3"		5'-6"	10		470	63




SIZE 2		NO. 5 STEEL BARS									
X	Y	3 BAR n		4 BAR p		BAR q		BAR r		LBS. 5	
		QTY.	LIN. FT.	QTY.	LIN. FT.	QTY.	LIN. FT.	QTY.	LIN. FT.	TOTAL	6
4'-6"	1'-3"	28	6'-0"	6	13'-9"	9	1'-9"	3	5'-0"	293	44
	2'-0"	30			15'-3"		2'-6"	4		328	47
	2'-6"	32			16'-3"		3'-0"	5		356	50
	3'-0"	34			17'-3"		3'-6"	6		385	53
	3'-6"	36			18'-3"		4'-0"	7		414	57
	4'-0"	38			19'-3"		4'-6"	8		442	60
	4'-6"	40			20'-3"		5'-0"	9		471	63
	5'-0"	42			21'-3"		5'-6"	10		500	66
5'-0"	1'-3"	30	6'-0"	6	14'-9"	10	1'-9"	3	5'-6"	316	47
	2'-0"	32			16'-3"		2'-6"	4		351	50
	2'-6"	34			17'-3"		3'-0"	5		381	53
	3'-0"	36			18'-3"		3'-6"	6		410	57
	3'-6"	38			19'-3"		4'-0"	7		440	60
	4'-0"	40			20'-3"		4'-6"	8		470	63
	4'-6"	42			21'-3"		5'-0"	9		500	66
	5'-0"	44			22'-3"		5'-6"	10		529	69

1 ADDITIONAL STEEL REINFORCEMENT REQUIRMENTS
(PIPE CHAMBER, H = 8' TO 15', SAG CONDITION)

SIZE 2		NO. 5 STEEL BARS									
X	Y	3 BAR n		4 BAR p		BAR q		BAR r		LBS. 5	
		QTY.	LIN. FT.	QTY.	LIN. FT.	QTY.	LIN. FT.	QTY.	LIN. FT.	TOTAL	6
4'-11"	1'-3"	28	6'-0"	6	14'-7"	10	1'-9"	3	5'-5"	302	44
	2'-0"	32			16'-1"		2'-6"	4		350	50
	2'-6"	34			17'-1"		3'-0"	5		379	53
	3'-0"	36			18'-1"		3'-6"	6		409	56
	3'-6"	38			19'-1"		4'-0"	7		438	60
	4'-0"	40			20'-1"		4'-6"	8		468	63
	4'-6"	42			21'-1"		5'-0"	9		498	66
	5'-0"	44			22'-1"		5'-6"	10		527	69

- 1 BASED ON "Z" AS EQUAL TO 6'-0".
- 2 SEE CUR. STD. DWGS. RDB-013 AND RDB-014 FOR LOCATION AND DIMENSIONS.
- 3 LENGTH OF "n" BAR IS ALWAYS SAME AS "Z" DIMENSION.
- 4 ADD OR SUBTRACT ONE "p" BAR PER EVEN FT. VARIANCE FROM 6'-0" "Z".
- 5 NO DEDUCTIONS HAVE BEEN MADE FOR PIPE.
- 6 ADD OR SUBTRACT LBS. STEEL PER FT. VARIANCE FROM 6'-0" "Z".
7. REINFORCEMENT SHALL HAVE A CLEAR DISTANCE OF 2" FROM THE

USE WITH CUR. STD. DWGS.
RDB-013 RDB-014 RDB-015
RDB-016 RDB-017 RDB-018

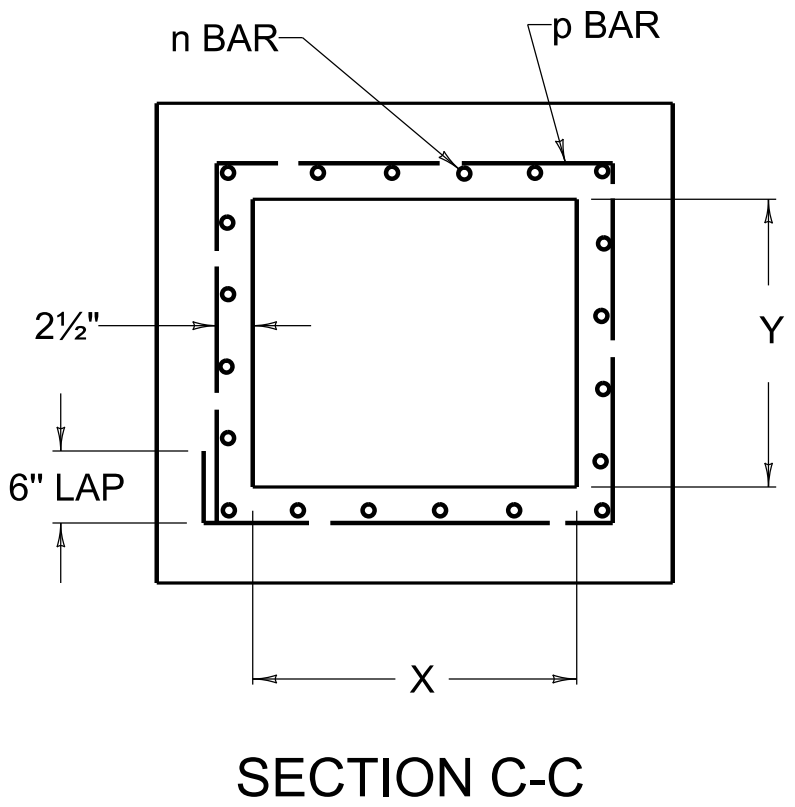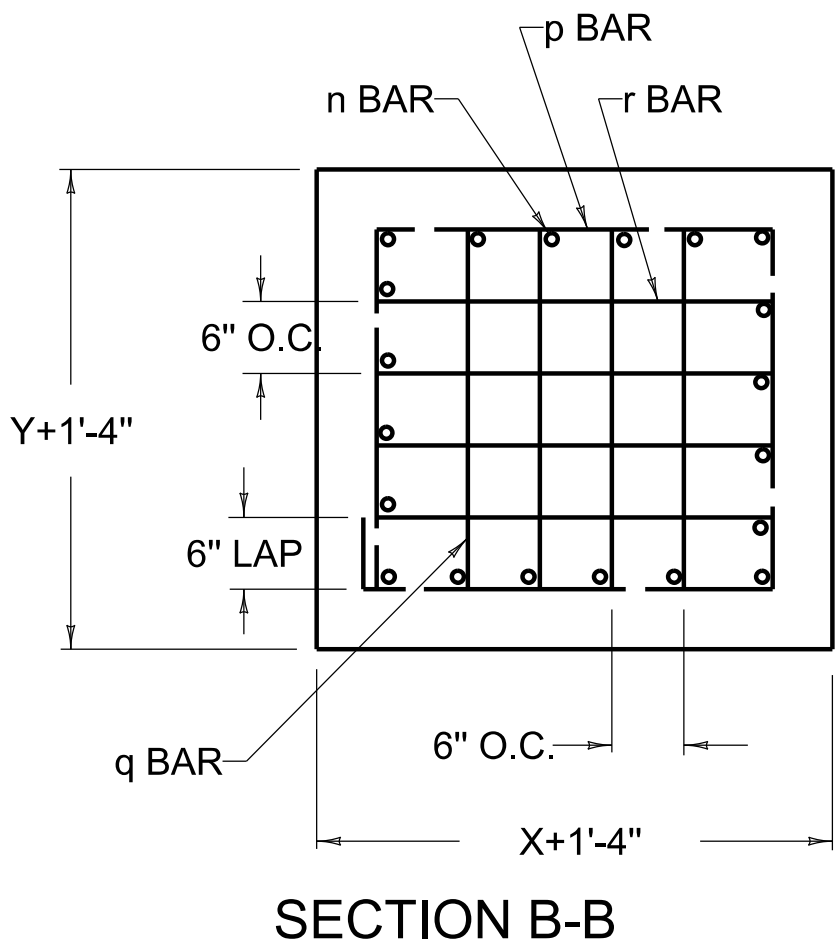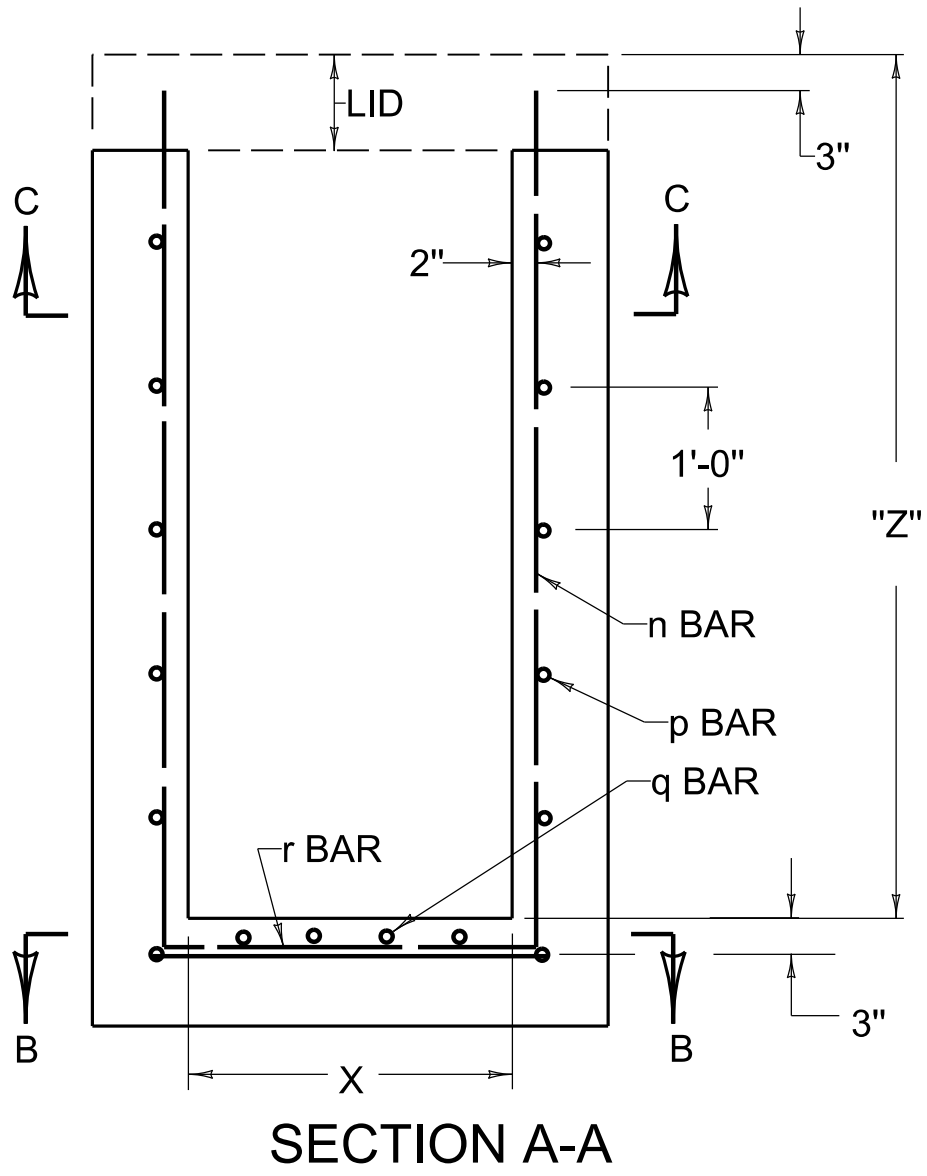

REVISION DATE: 12/01/2015
REVISION NUMBER: 0

12-01-2015
DATE

12-01-2015
DATE

APPROVED

APPROVED

DRAINAGE



COMMONWEALTH OF KENTUCKY
DEPARTMENT OF HIGHWAYS



INLETS

DROP BOX INLET TYPE 13 (ADDITIONAL STEEL- CHAMBER)

STANDARD DRAWING NUMBER
RDB-019-04