


0° SKEW 24'-0" - 25'-6" BRIDGE WIDTH (No Seismic Load)


[illegible]

Reinforcement Details

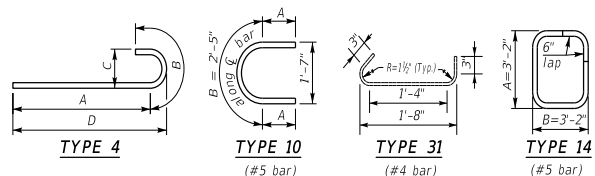


Note: All bars in cap shall be epoxy coated.

Note: All concrete shall be Class "A"

		DIMENSIONS TABLE										QUANTITIES																			
												CONCRETE CLASS "A"				STEEL REINFORCEMENT EPOXY COATED		STEEL REINFORCEMENT													
												H	CU. YDS. (I)		LBS.		LBS.														
													H		A		B		C		D		H		A		B		C		D
H		A		B		C		D		H		A		B		C		D		H		A		B		C		D			
ft.		in.		ft.		in.		ft.		in.		ft.		in.		ft.		in.		ft.		in.		ft.		in.		ft.		in.	
10-11		2 6		2 9		13 3		5 6		10-11		52.2		1055		5973															
12-13		2 6		2 9		13 3		5 6		12-13		55.3		1055		6438															
14-15		2 6		2 9		13 3		5 6		14-15		58.3		1055		6902															
16-17		2 6		2 9		13 3		5 6		16-17		61.4		1055		7366															
18-19		2 6		2 9		13 3		5 6		18-19		64.4		1055		7830															
20-21		2 6		2 9		13 3		5 6		20-21		67.5		1055		8295															
22-23		2 6		2 9		13 3		5 6		22-23		70.5		1055		8759															
24-25		2 6		2 9		13 3		5 6		24-25		73.6		1055		9223															


TYPE 2
(For Stepped Cap)
A=Ht. diff.-2" Cl.
+2" O'emo.
B=1'-2½"

(1) Quantity is based on taller height.
Reduce by 1.5 cubic yard for shorter height.

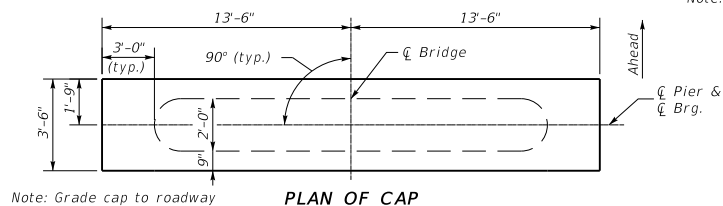


Note: Grade cap to roadway grade for box beams.
Step cap if necessary for steel beams.


PLAN OF CAP

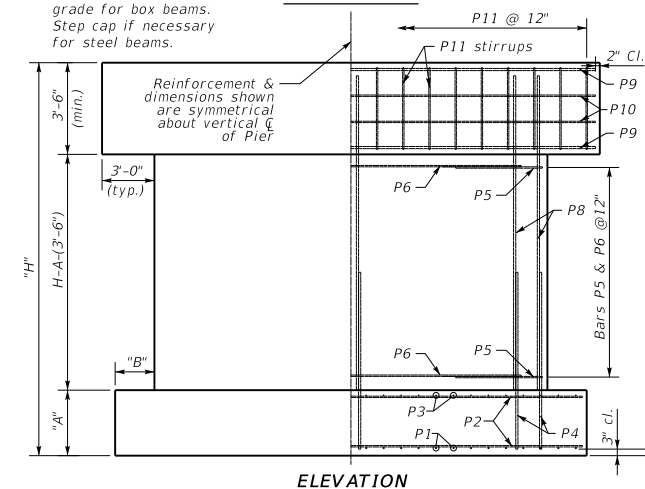

ELEVATION

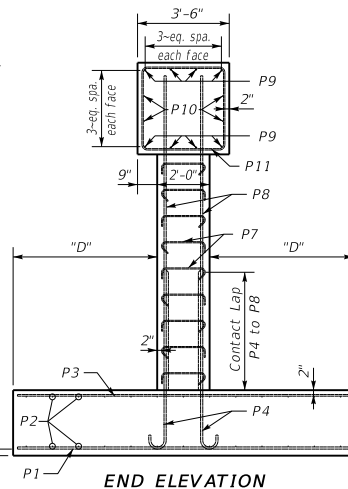


END ELEVATION

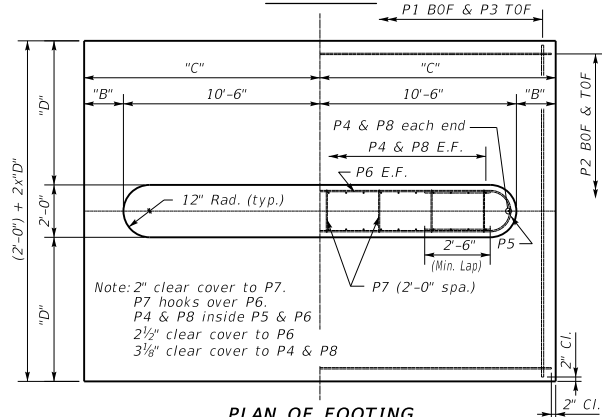

Note: 2" clear cover to P7.
P7 hooks over P6.
P4 & P8 inside P5 & P6
2½" clear cover to P6
3⅛" clear cover to P4 & P8

PLAN OF FOOTING

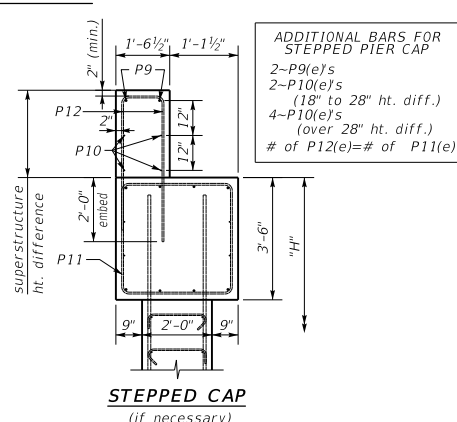

ADDITIONAL BARS FOR
STEPPED PIER CAP
2~P9(e)s
2~P10(e)s
(18" to 28" ht. diff.)
4~P10(e)s
(over 28" ht. diff.)
of P12(e)=# of P11(e)

STEPPED CAP
(if necessary)

GENERAL NOTES

SPECIFICATIONS: Construct piers according to the current edition of the Kentucky Department of Highways Standard Specifications for Road and Bridge Construction. Piers are designed for side by side box beams as detailed in Standard Drawings BDP-001 through BDP-012, current edition. They may be slightly modified to allow for 25'-6" rolled steel beam bridge width.

FOUNDATION PRESSURE: Construct pier footings on solid rock bearing material that can support a pressure of 8000 psf service or 10,800 psf strength factored as recommended by a geotechnical engineer.


DESIGN LOADS: Pier is designed for the CB42 beam superstructure with 3-97 foot spans. Pier is designed to handle a half a 97 foot span for thermal load with expansion bearings under the beams. Pier is designed for 100 mph wind. Wind on superstructure is for 1-97' span longitudinal and transverse. Pier is designed for stream flow of 10 ft./sec. up to the top of the pier. It is not designed for flow acting on the superstructure. Pier is not designed for earthquake loading.

DESIGN APPLICABILITY: Consult with a structural engineer to determine if these details are applicable for any particular project.

FOOTING ELEVATION: Construct bottom of footing below the anticipated scour elevation. (This typically entails embedding the footings 1'-0" to 2'-0" into rock and pouring concrete directly against cut rock faces as recommended by geotechnical engineer.)

NOTE: Distances to bars shown are clear dimensions unless otherwise noted.

MATERIAL SPECIFICATIONS:
Concrete, Class "A" = 3500 psi
Steel Reinforcement = Grade 60

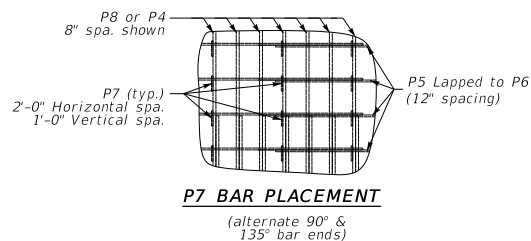

P7 BAR PLACEMENT

(alternate 90° & 135° bar ends)

KENTUCKY DEPARTMENT OF HIGHWAYS	
<i>Standard Pier</i> <i>0° Skew</i> <i>24'-0"-25'-6" Bridge Width</i>	
STANDARD DRAWING NO. <i>BSP-002</i>	
SUBMITTED <i>B. J. Baker</i>	DATE <i>02-26-20</i>
DIRECTOR DIVISION OF STRUCTURAL DESIGN	
APPROVED <i>B. J. Baker</i>	DATE <i>02-26-20</i>
STATE HIGHWAY ENGINEER	