


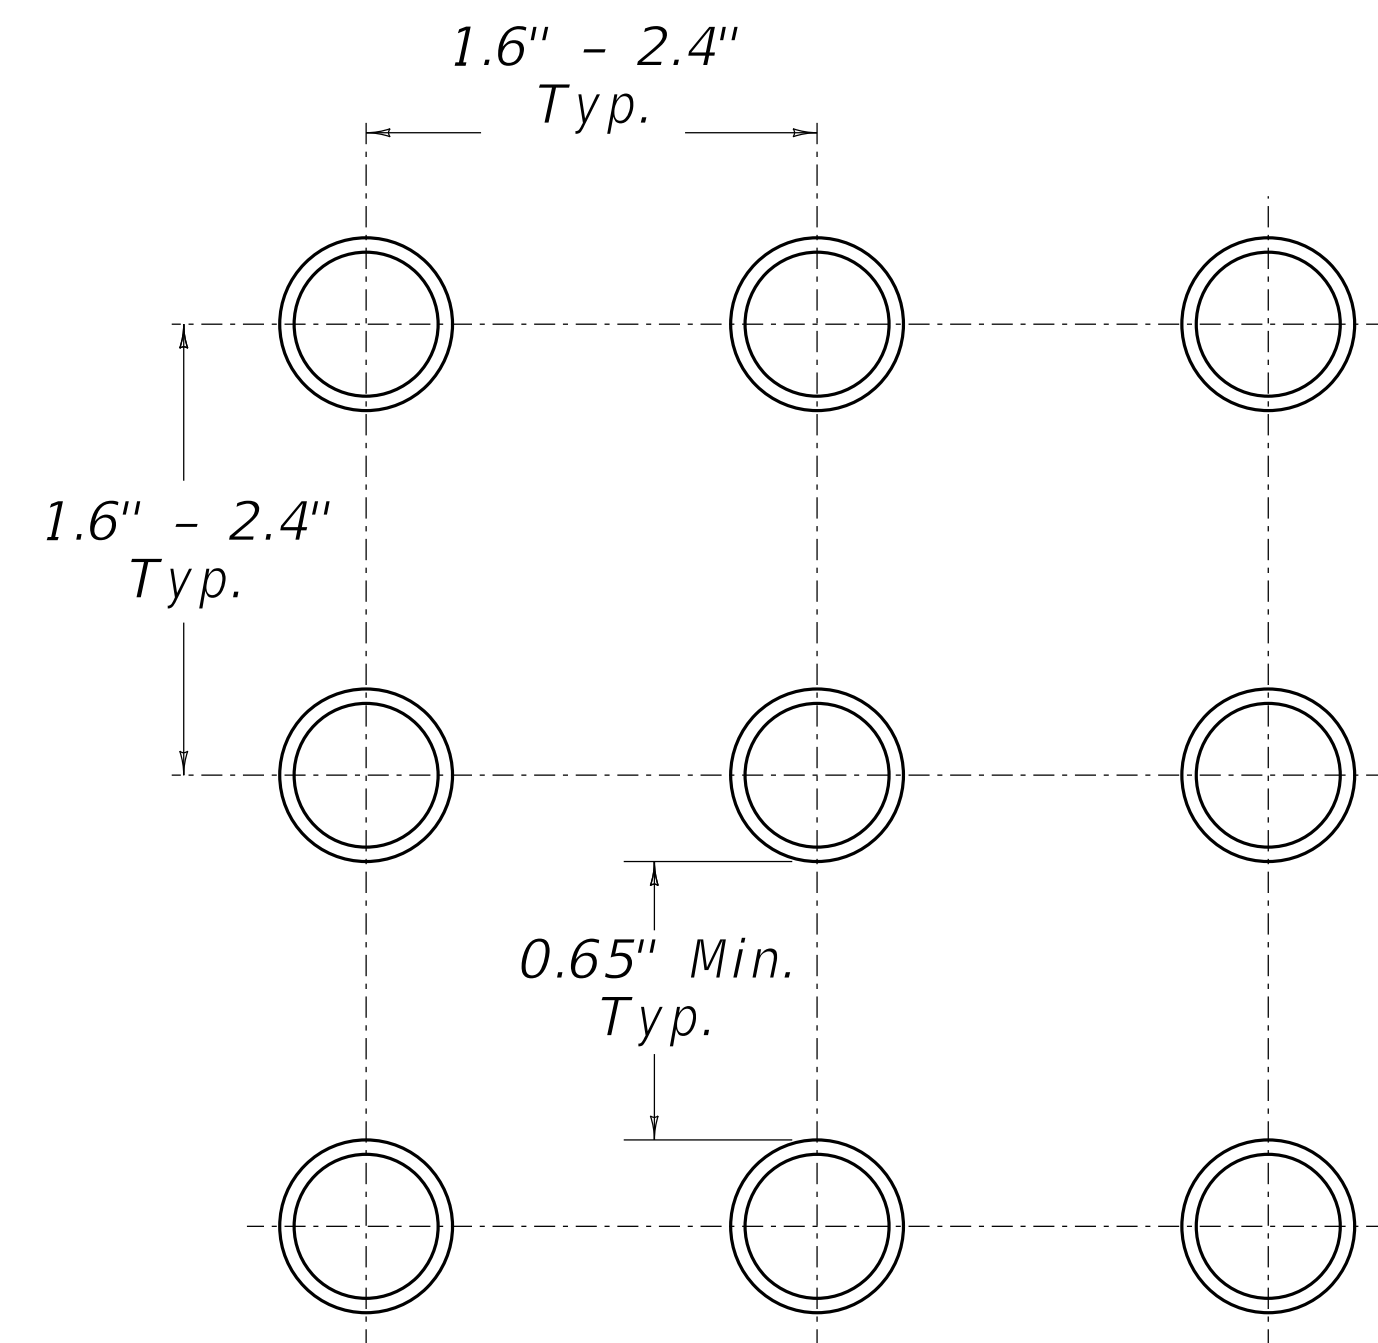


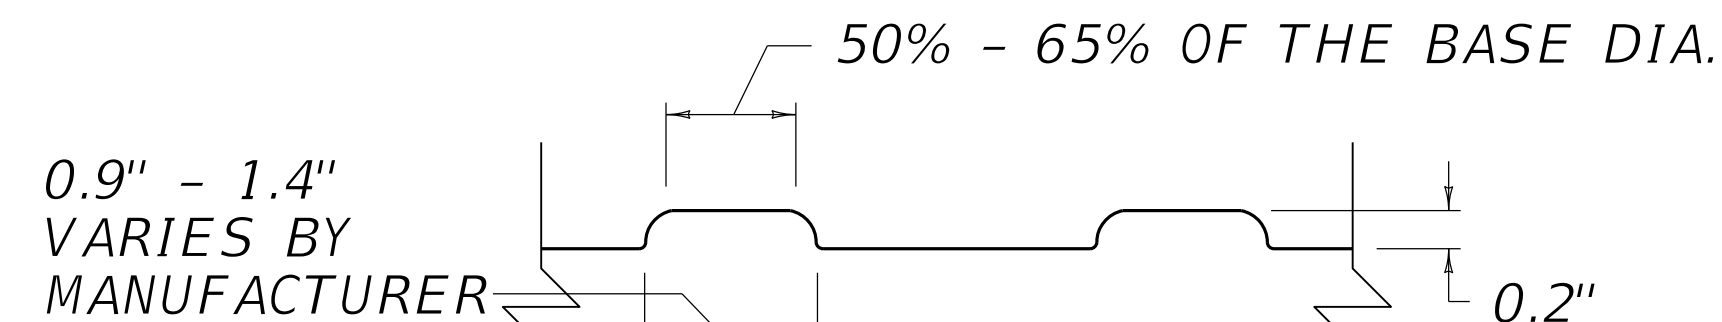

SQUARE PATTERN

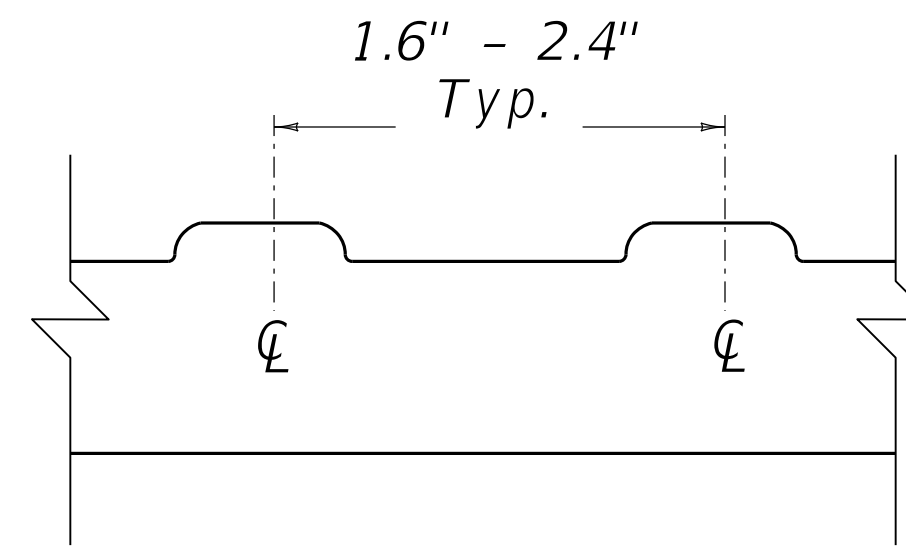

CONCRETE PAVER PROFILE

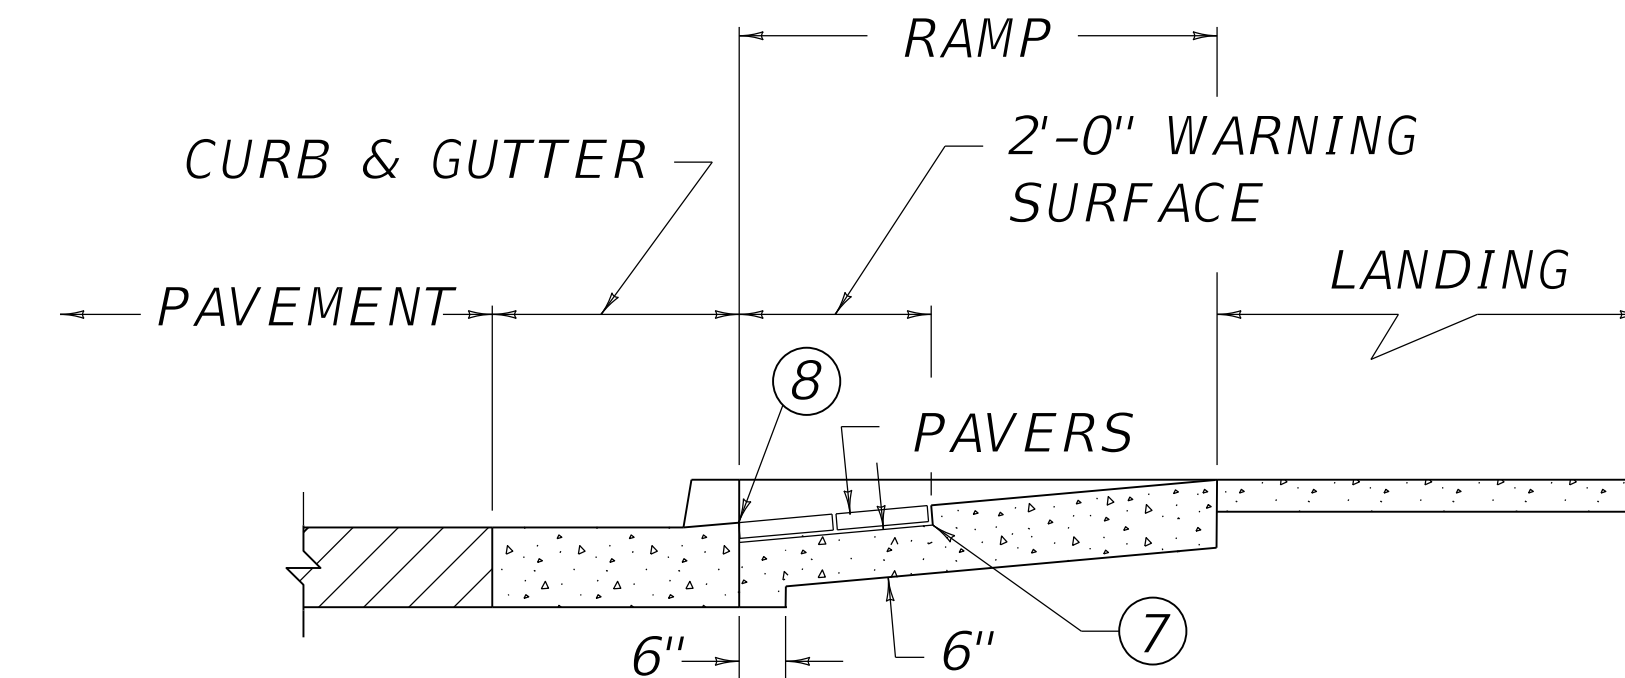

TYPICAL CONCRETE
PAVER DETECTABLE
WARNING INSTALLATION

~ NOTES ~

BID ITEM AND UNIT TO BID.
DETECTABLE WARNINGS

SF

1. LANDINGS WILL PROVIDE A LEVEL AREA (MAX. 2% GRADE OR CROSS SLOPE) AT APPROXIMATE STREET ELEVATION. A 4' SQUARE LEVEL LANDING IS THE REQUIRED MINIMUM. SEE NOTE 9 ON CUR. STD. DWG. RPM-170.
2. DETECTABLE WARNINGS SHALL BE INSTALLED USING CONCRETE PAVERS IN ACCORDANCE WITH THE CURRENT EDITION OF THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
3. JOINTS AROUND PAVERS SHALL BE FILLED WITH DRY MORTAR. MORTAR SHALL BE BRUSHED IN WITH A COURSE BROOM. SAND WILL NOT BE ALLOWED.
4. COMMERCIAL DRIVEWAYS WITH TRAFFIC CONTROL DEVICES REQUIRE ADA SIDEWALK TREATMENTS WITH DETECTABLE WARNINGS.
5. CONCRETE PAVERS SHALL BE CONCRETE WITH A MINIMUM THICKNESS OF 2".
6. CONCRETE PAVERS SHALL BE A COLOR HOMOGENOUS THROUGHOUT THE PAVER, THAT COLOR SHALL CONTRAST VISUALLY WITH THE ADJOINING SURFACES, EITHER LIGHT-ON-DARK OR DARK-ON-LIGHT. THE DEPARTMENT WILL ALLOW EITHER YELLOW OR RED AS COLORS.
- ⑦ CONCRETE PAVERS SHALL BE SET IN MORTAR.
- ⑧ DETECTABLE WARNING SURFACE BEGINS AT BACK OF CURB.

USE WITH CUR. STD. DWGS.
RPM-170 RPM-172

REVISION DATE: 12/01/2015
REVISION NUMBER: 0

SUBMITTED 12-01-2015
DATE

APPROVED 12-01-2015
DATE

GENERAL



COMMONWEALTH OF KENTUCKY
DEPARTMENT OF HIGHWAYS



MISCELLANEOUS

DETECTABLE WARNINGS

STANDARD DRAWING NUMBER
RGX-040-03