


48" X 48"

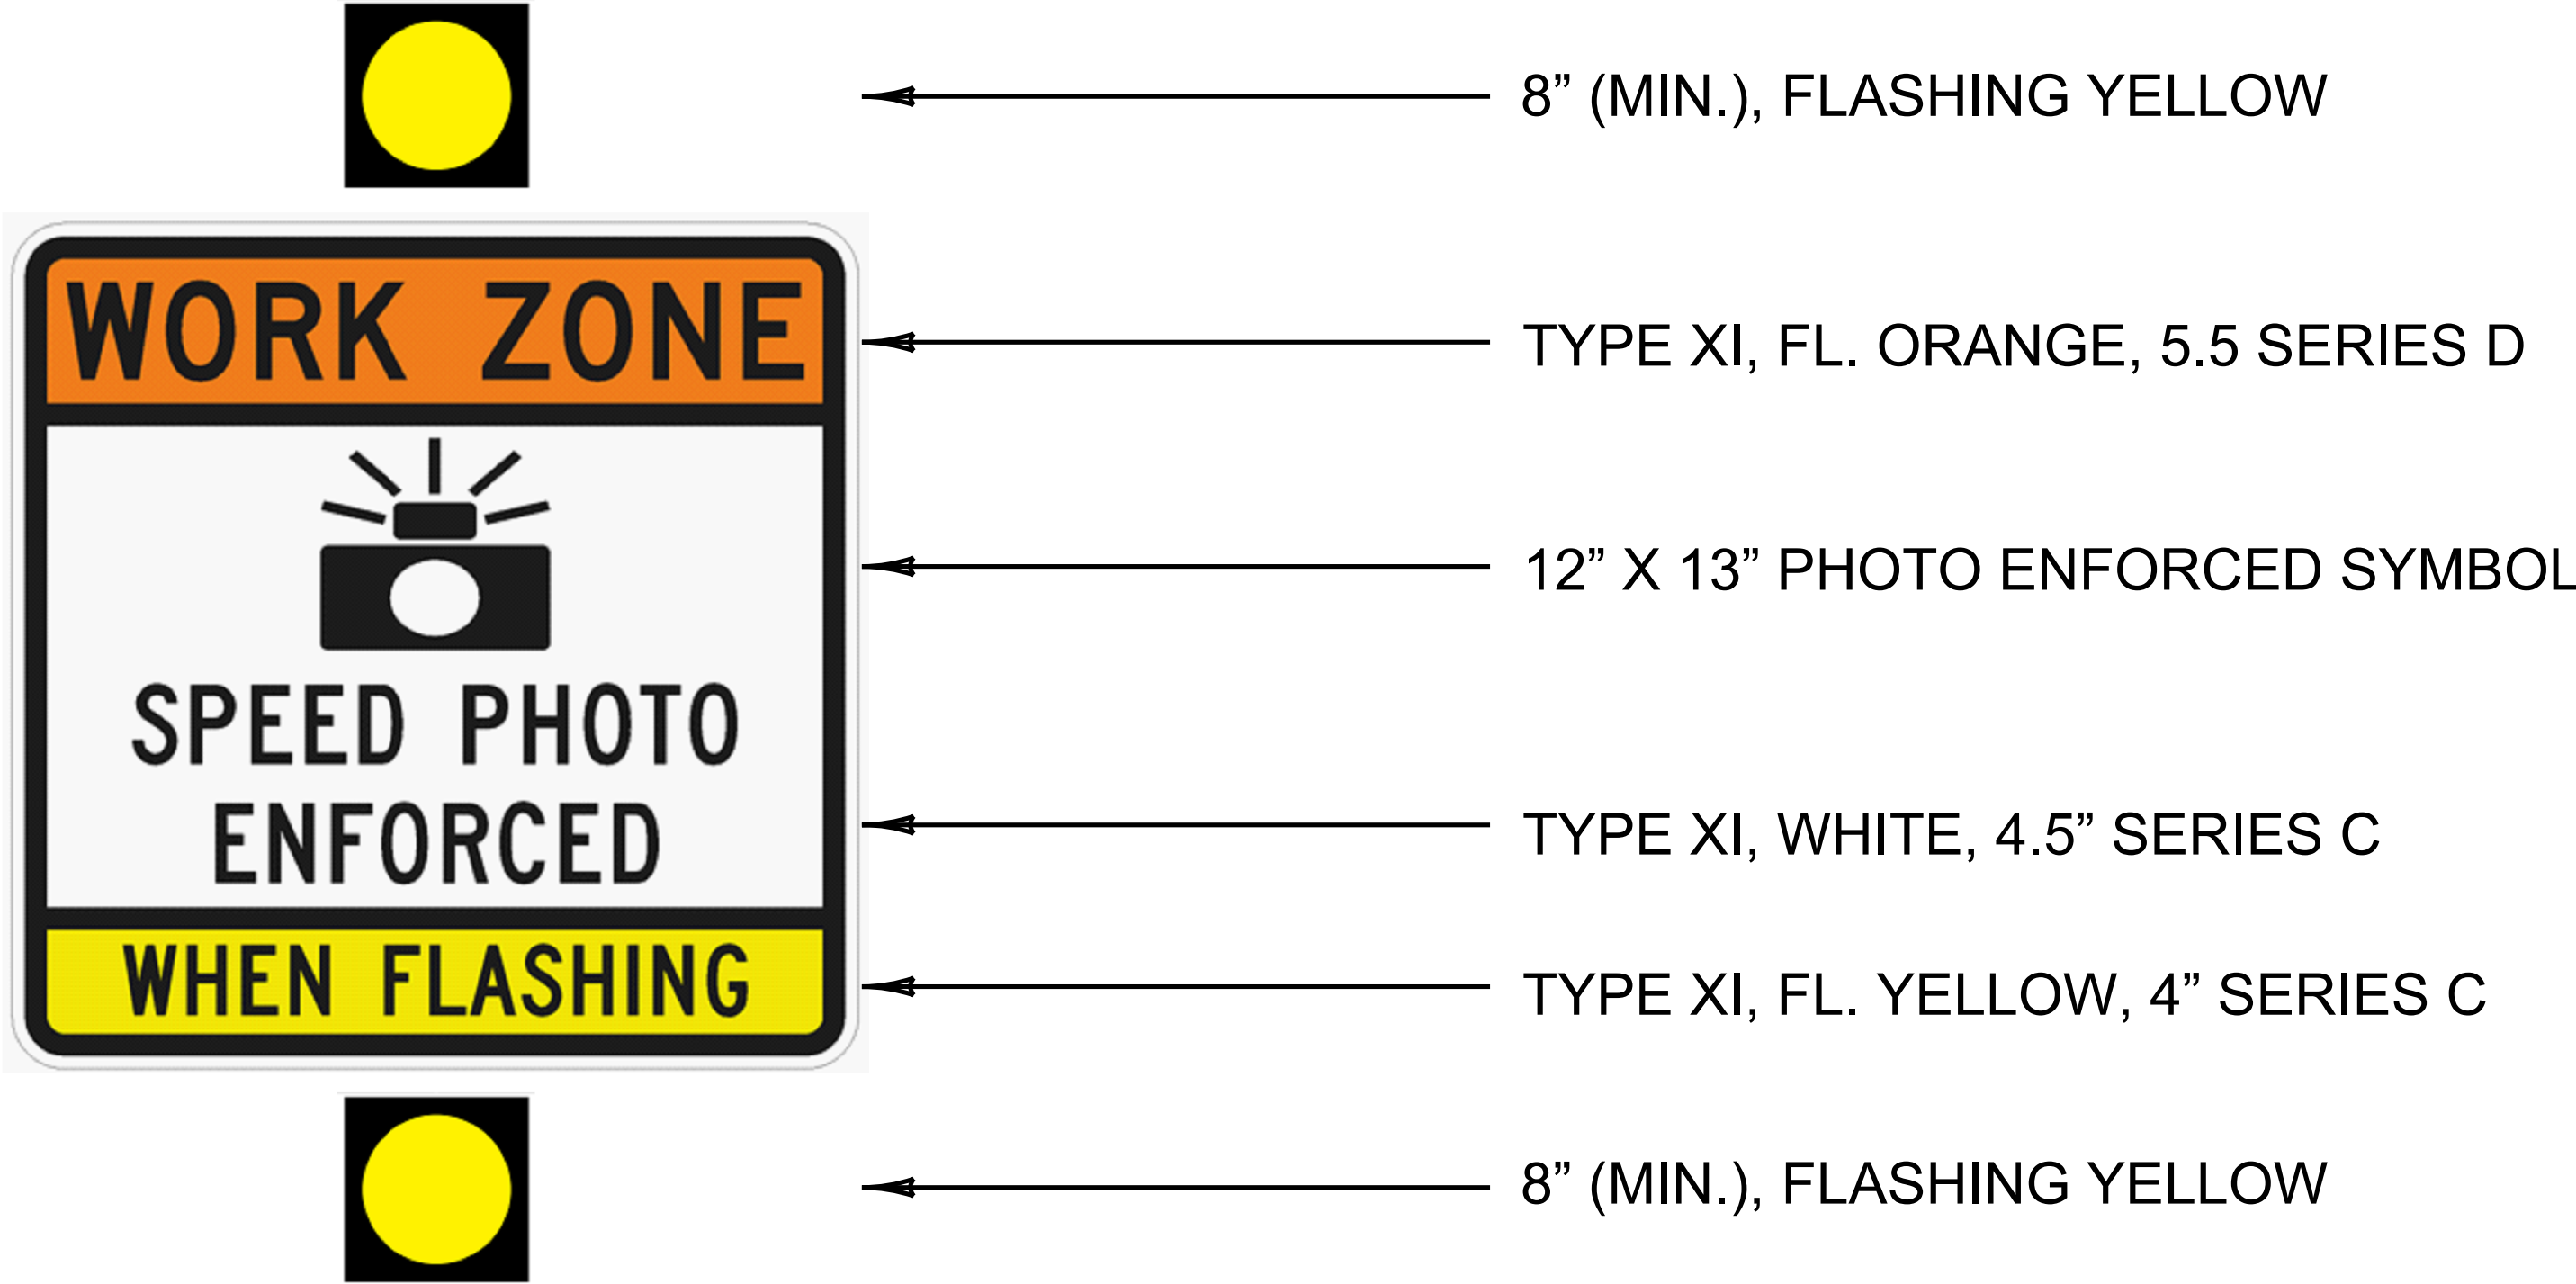

APPLICATION

THE ENGINEER MAY DETERMINE WHETHER TO UTILIZE AUTOMATED ENFORCEMENT WITHIN A HIGHWAY WORK ZONE BASED ON ENGINEERING JUDGMENT. IN ACCORDANCE WITH KRS 189.2326, AUTOMATED SPEED ENFORCEMENT DEVICES MAY BE USED WITHIN A WORK ZONE TO TRANSMIT A VEHICLE'S SPEED AND AN IMAGE OF THE LICENSE PLATE TO SUPPORT ONSITE ENFORCEMENT. CITATIONS CAN BE ISSUED IF ALL OF THE FOLLOWING CONDITIONS APPLY:

- 1. MOTOR VEHICLES ARE TRAVELING IN EXCESS OF 10 MILES PER HOUR OVER THE SPEED LIMIT
- 2. AT LEAST ONE BONA FIDE WORKER IS PRESENT IN THE WORK ZONE
- 3. A PEACE OFFICER IS PRESENT IN OR NEAR THE END OF THE HIGHWAY WORK ZONE IN A MARKED VEHICLE
- 4. SIGNS WITH BEACONS ARE ACTIVATED WITHIN THE HIGHWAY WORK ZONE

~ NOTES ~

- 1. BEACONS SHALL BE FLASHED ALTERNATELY AND ONLY OPERATED WHEN SPEED LIMITS ARE BEING ENFORCED USING AUTOMATED SPEED ENFORCEMENT DEVICES.
- 2. BEACONS SHOULD INCLUDE AUTOMATIC DIMMING TO REDUCE THE BRILLIANCE OF FLASHING YELLOW INDICATIONS DURING NIGHT OPERATION.
- 3. BEACONS SHALL BE FLASHED AT A RATE OF NOT LESS THAN 50 OR MORE THAN 60 TIMES PER MINUTE. THE ILLUMINATED PERIOD OF EACH FLASH SHALL BE A MINIMUM OF 1/4 AND A MAXIMUM OF 3/4 OF THE TOTAL CYCLE.
- 4. IF SPEEDS ARE TO BE ENFORCED USING AUTOMATED DEVICES THROUGH ENTIRE WORK ZONE, THE AUTOMATED ENFORCEMENT SIGN ASSEMBLY SHOULD BE LOCATED BETWEEN THE LAST ADVANCE WARNING SIGN AND THE WORK AREA. REFER TO SHEET 004 FOR ADDITIONAL INFORMATION REGARDING RECOMMENDED LOCATIONS OF AUTOMATED ENFORCEMENT SIGNS IN RELATION TO OTHER WORK ZONE SIGNING.

BID ITEM AND UNIT TO BID

TEMPORARY SIGNS SQFT

WHEN APPLICABLE, USE WITH SHEETS 001, 002, AND 004.

