


TYPICAL RIGHT-TURN CHANNELIZING ISLAND MARKINGS

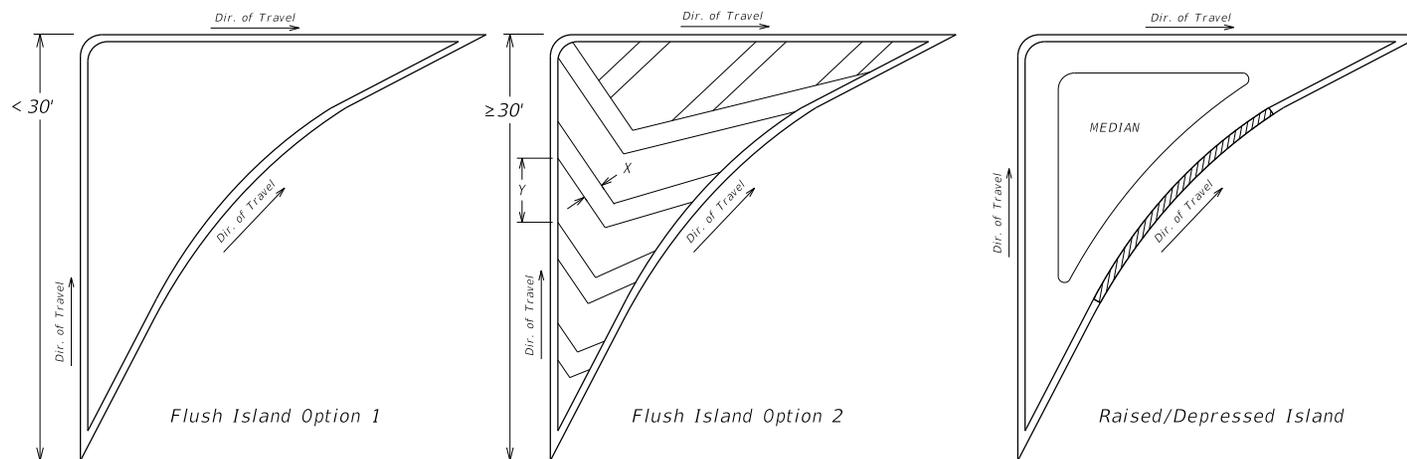

GENERAL NOTES

THE MINIMUM WIDTH (X) OF CROSSHATCH MARKINGS IS 12" FOR LOW SPEED ROADS (< 45 MPH) AND 24" FOR HIGH SPEED ROADS ( $\geq$  45 MPH).

THE SPACE BETWEEN ADJACENT CROSSHATCH MARKINGS (Y) SHOULD BE SET AT 10 TIMES THE WIDTH (X) OF THE CROSSHATCH MARKINGS.

CROSSHATCH MARKINGS SHOULD NOT BE PLACED IN A MEDIAN LESS THAN 6' IN WIDTH.


CROSSHATCH MARKINGS SHOULD NOT BE PLACED IN AN ISLAND IF ANY SIDE OF AN ISLAND IS LESS THAN 30' IN LENGTH.

THE OUTLINE OF AN ISLAND SHOULD BE EITHER 8" OR 12".


MEDIAN NOSES MAY BE EITHER A SINGLE 12" LINE OR A SOLID SEMI-CIRCLE.

CROSSHATCH AND CHEVRON MARKINGS SHOULD BE THERMOPLASTIC.

TYPICAL LEFT-TURN LANE / FLUSH MEDIAN CROSSHATCH MARKINGS

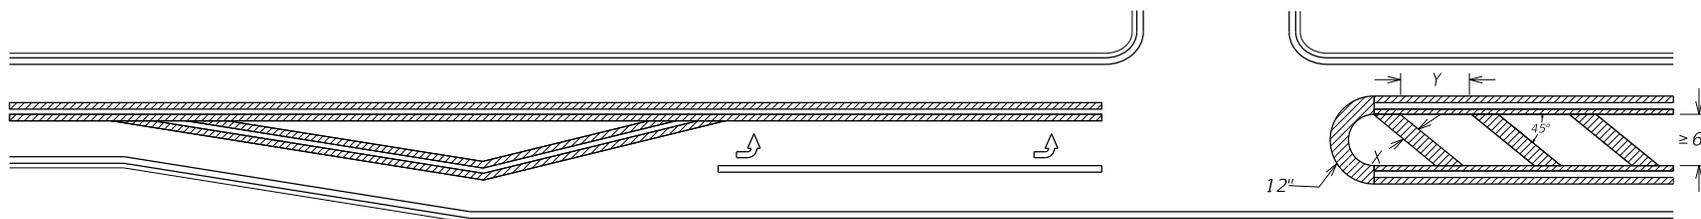

TYPICAL TWO-WAY LEFT-TURN LANE (TWLTL) TRANSITION MARKINGS

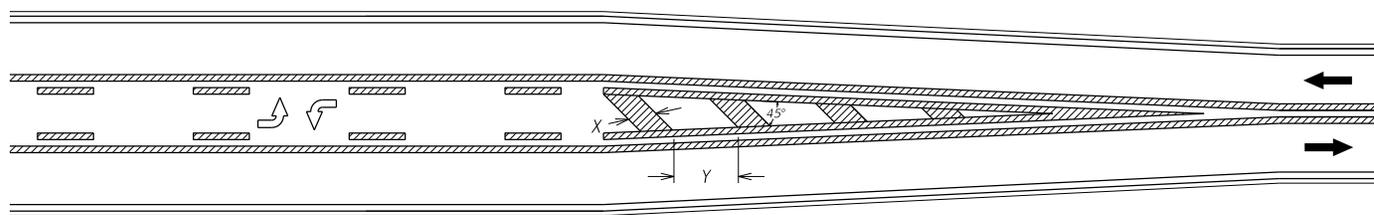

Note: Crosshatch markings shall be placed in the transition area of a TWLTL.

DRAWING NOT TO SCALE

| LEGEND   |        |
|----------|--------|
| MARKINGS |        |
|          | WHITE  |
|          | YELLOW |

KENTUCKY  
DEPARTMENT OF HIGHWAYS

TYPICAL MARKINGS  
FOR ISLANDS  
AND MEDIANS

STANDARD DRAWING NO. **TPM-205**

SUBMITTED *R. Allen White* 02-26-20  
DATE DIRECTOR, DIVISION OF SAFETY OPERATIONS  
APPROVED *[Signature]* 02-26-20  
DATE STATE ENGINEER